



ZOOMLION

Machine 2D graph

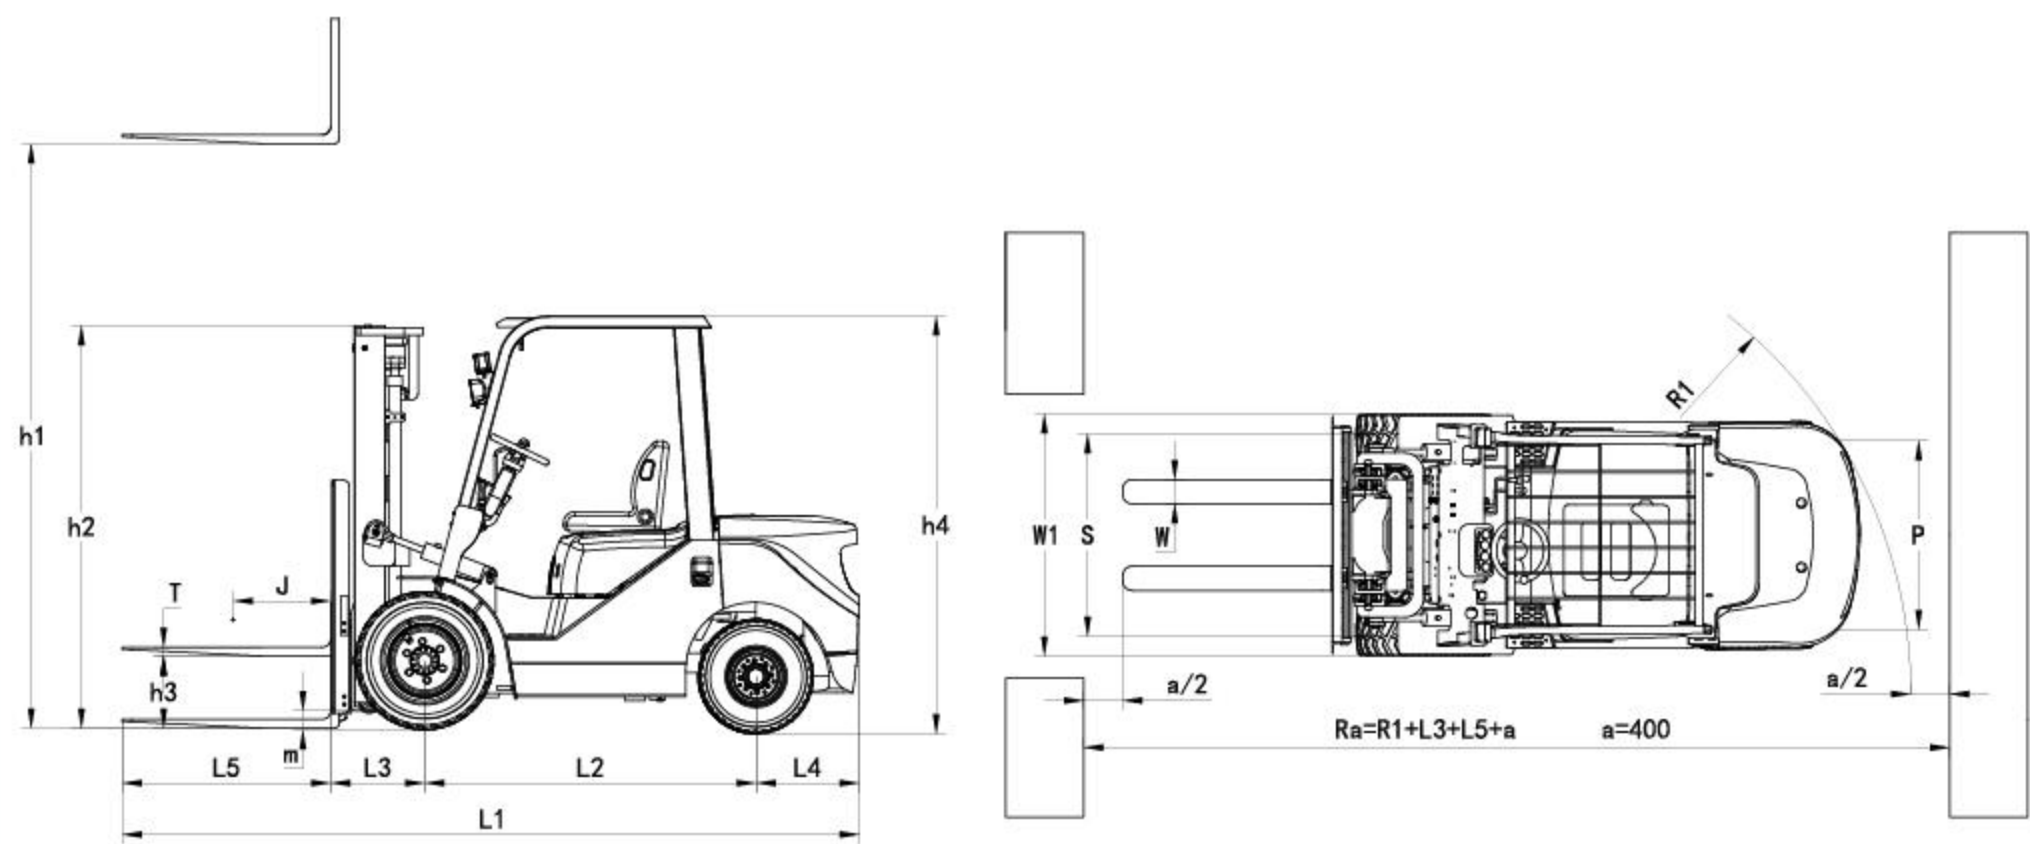

CAPACITY CHART

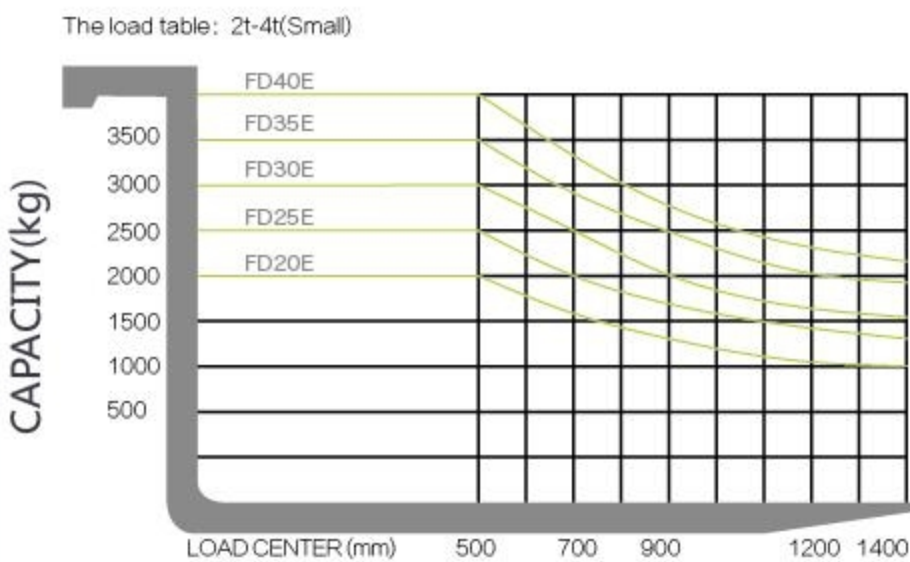

Specification of Optional Engine

Model	Rated Power/Speed (kW/r.p.m)	Rated torque (N · m/r.p.m)	Displacement (L)	Remarks
-	(kW/r.p.m)	(N · m/r.p.m)	(L)	-
QUANCHAI 490GP	39/2650	157/1980	2.67	2-3.5T
ISUZU C240PKJ	34.3/2500	137.7/1800	2.369	2-3.5T
ISUZU 4JG2PE-01	44.9/2450	186.3/1800	3.059	2-4T
JMC493	39/2500	165/1800	2.369	2-3.5T
YANMA 4TNE92	32.8/2450	149.4/1600	2.659	2-2.5T
YANMA 4TNE98	44.1/2300	196.3/1700	3.319	2-4T
DACHAI CA498	45/2500	190/1800	2.98	4T
WEICHAI WP2.7	40/2650	165/1800	2.67	2-3.5T
QUANCHAI4C2-50M42	36.8/2500	150-154/1800	2.67	2-3.5T
XINCHANG4D27G40	36.8/2500	156/1800-2000	2.67	2-3.5T



## FD20/25/30/35/40(E Series) DIESEL FORKLIFT

ZOOMLION ANHUI INDUSTRIAL VEHICLE CO.,LTD

ADD:Building 2,NO.1Nanwei Road,High-tech Development Zone,Wuhu,Anhui,China  
TEL: 0553-3020328 WEB: www.zoomlionfl.com



ZOOMLION





Zoomlion Anhui Industrial Vehicle Co., Ltd. is one of the important sectors of Zoomlion Group, established in 2010, covering an area of nearly 300 acres with the total investment of 600 million yuan. After second phase project it will have an annual output of 30,000 units of production capacity for industrial vehicles. The modern factory and process layout, advanced production equipment beckon Zoomlion's sincere and modest, profound and long-standing brand connotation.

Relying on Zoomlion advanced technology and process equipment in professional manufacturing field, our product creativity is improved effectively and the product resource combination is formed, which can meet demands of the mainstream markets at home and abroad. It has now formed the internal combustion type, battery type, storage type, 209 kinds of forklift products resources. Currently, Zoomlion forklift products have been widely used in papermaking, automobile, tobacco, logistics, stone material and other industries.

Sticking to the idea of "providing high quality service by adopting exquisite technique", our company attaches much importance to customers various demands in different stages, such as purchase, usage, maintenance, update, etc. In addition, we bring our customers pleasure, touched and added economic interests by providing intimate service.

Through Call Center, Internet, Remote Assistance, On-the-spot Operation and other modern innovative service modes, our company formed and consolidated the dominant position of Zoomlion forklift in the field of after-sales service.

## TECHNICAL FEATURES

### Safe & Green

- Protective measures are provided for the parking brake.
- The vehicle emission complies with the latest China's environmental protection standard.
- The grid type roof is employed so that the operation field of sight is excellent and reliability is extraordinary.
- The fork carrier made of J-type steel channels with composite rollers is used for vehicles of 2-3.5t to stabilize the starting and provide high strength.2.
- The wide steps and broad driving space is provided to decrease the fatigue due to operation by legs.
- The middle exhaust tailpipe is installed to effectively prevent dust raising due to low exhaust.
- Conical sealing is adopted for the rubber pipes and joints in the hydraulic lines, which enjoys satisfactory sealing effect and no oil leak for long.
- The control stick arrangement is optimized with brand new control handle and wide operation space, making operation more comfortable.

### Advanced design

- The running speed is increased and operation efficiency is improved.
- The tail of the counterweight sees a ventilation area that is increased by 10% to further facilitate the cooling.
- The sedan-type double-handle combination switch is configured to ease and facilitate the operation.
- Connections between steering axle and frame are shock-absorption treated, lowering the vehicle vibration by 30%.
- Compared with vehicles of the same series of other brands, this vehicle enjoys great weight, stronger load-bearing capability and high cost performance.
- The vertical buffer function is designed for the lifting system so as to effectively decrease the impact and shock of the mast.

### Comfortable & practical

- The vehicle is applied with brand new coating with a fresh and attractive tone. The color is matched more reasonably and delighting.



## DIESEL FORKLIFT FD20/25/30/35/40 (E)

FEATURES		FD20E	FD25E	FD30E	FD35E	FD40E (Small)
Power	—	Diesel	Diesel	Diesel	Diesel	Diesel
Rated Capacity	kg	2000	2500	3000	3500	4000
Center of load	J(mm)	500	500	500	500	500
Lifting height	h1 (mm)	3000	3000	3000	3000	3000
Free lifting height	h3(mm)	116	116	163	160	85
Forks L×W×H	L5×W×T(mm)	920×122×40	1070×122×40	1070×125×45	1070×125×50	1070×150×50
Tilt Forward/Backward	°	6/12	6/12	6/12	6/12	6/12
Min.turning radius	R1 (mm)	2305	2350	2493	2525	2750
Min.ground clearance(Mast)	Ra(mm)	4100	4295	4446	4490	4722
ground clearance(Mast)	m(mm)	110	110	120	120	125
Overhead guard height	h4(mm)	2150	2150	2170	2170	2150
Front overhang	L3(mm)	475	475	480	495	502
Rear overhang	L4(mm)	470	490	530	570	540

PERFORMANCE						
Max.traveling speed(loaded)	km/h	19	19	20	20	17
Max.lifting speed(loaded/empty)	mm/s	470/510	470/510	470/520	470/520	410/468
Drawbar pull/Gradeability	kN/%	17/20	17/20	18/20	18/20	20/20

Size						
Overall length (without fork)	L1 (mm)	3465	3635	3780	3835	4012
Overall width	W1 (mm)	1175	1175	1230	1230	1410
Mast lowered height	h2(mm)	1995	1995	2065	2095	2160
Mast extended height	mm	4025	4025	4260	4265	4265

CHASSIS						
Tire Front	—	7.00-12-12PR	7.00-12-12PR	28×9-15-12PR	28×9-15-12PR	250-15-160PR
Tire Rear	—	6.00-9-10PR	6.00-9-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
Wheelbase	L2(mm)	1600	1600	1700	1700	1900
Tread width(Front/Rear)	S/P(mm)	970/970	970/970	1000/970	1000/970	1160/1065
Curb weight(Non-load)	kg	3480	3800	4350	4850	5300

ENGINE						
Battery(Voltage/Capacity)	V/Ah	12/90	12/90	12/90	12/90	12/90
Engine(Model)	—	XinChang490BPG	XinChang490BPG	XinChang490BPG	XinChang495BPG	XinChang498BPG
Engine(Rated power)	kW/r.p.m	37/2650	37/2650	37/2650	42/2650	45/2500
Engine(Rated torque)	N · m/r.p.m	148/2000	148/2000	148/2000	174/2000	193/1600-1800
Engine(Cylinder amount)	—	4	4	4	4	4
Engine(Bore×Stroke)	mm	90×100	90×100	90×100	95×105	98×105
Engine(Displacement)	L	2.54	2.54	2.54	2.98	3.168
Fuel tank	L	70	70	70	70	70
Transmission	—	2/2 Manual Shift	2/2 Manual Shift	2/2 Manual Shift	2/2 Manual Shift	2/2 Manual Shift
Working pressure	MPa	17.5	17.5	17.5	17.5	17.5

The company reserve the right for specification change; Should any revision on specification, a further notice shall prevail.

STANDARD CONFIGURATION			OPTIONS	ATTACHMENT
Widewiew mast Standard fork Standard seat Handle Turner Backrest Light switch Toolbox Rubber pad Tornado air filter	2 piece multi valve Rear lamp Neutral Indicator Electric Horn Turning signal Service brake Traction pin Headlamp Parking brake Rearview mirror	Speed limit valve Engine flameout device Oil pressure indicator Durable pneumatic tire Key switch Overhead guard Reversing light Reversing buzzer Hydraulic oil return filter Hydraulic oil intake filter	Hydraulic powered steering Adjustable steering wheel Upper air intake device Tilt oil passage self-locking valve Water temperature gauge Combined instrument panel Hydraulic oil level gauge Lifting & tilting handle	<input type="checkbox"/> Cab <input type="checkbox"/> Heater <input type="checkbox"/> Solid tyre <input type="checkbox"/> Rear light <input type="checkbox"/> Mini fan <input type="checkbox"/> Double filter <input type="checkbox"/> File clip <input type="checkbox"/> Windshield <input type="checkbox"/> Luxury seat <input type="checkbox"/> High exhaust <input type="checkbox"/> Fire extinguishing muffler <input type="checkbox"/> Rotary work alarming light <input type="checkbox"/> Fire extinguisher <input type="checkbox"/> Engine preheater <input type="checkbox"/> Optional painting <input type="checkbox"/> Tilt cylinder dust cover <input type="checkbox"/> Two/three stage full-free mast <input type="checkbox"/> Double front tire and protector <input type="checkbox"/> Exhaust smoke purification <input type="checkbox"/> muffer <input type="checkbox"/> Side shifter <input type="checkbox"/> Fork positioner <input type="checkbox"/> Hinged fork <input type="checkbox"/> Carpet boom <input type="checkbox"/> Extended fork <input type="checkbox"/> Fork cover <input type="checkbox"/> Lifting boom <input type="checkbox"/> Paper roll clamp <input type="checkbox"/> Bale clamp <input type="checkbox"/> Rotator <input type="checkbox"/> Barrel clamp

DUPLEX STANDARD MAST														
Lifting	Capacity					Mast height								MastTilt
	2T	2.5T	3T	3.5T	4T(Small)	2T-2.5T	2T-2.5T	3T	3T	3.5T	3.5T	4T(Small)	4T(Small)	
Height	Single tire					Forks landing	Height with Backrest	Forks landing	Height with Backrest	Forks landing	Height with Backrest	Forks landing	Height with Backrest	angle F/R
mm	kg	kg	kg	kg	kg	mm	mm	mm	mm	mm	mm	mm	mm	°
2000	2000	2500	3000	3500	4000	1495	3025	1565	3260	1595	3265	1660	3265	6/12
2500	2000	2500	3000	3500	4000	1745	3525	1815	3760	1845	3765	1910	3765	6/12
3000	2000	2500	3000	3500	4000	1995	4025	2065	4260	2095	4265	2160	4265	6/12
3300	2000	2500	3000	3500	4000	2145	4325	2215	4560	2245	4565	2310	4565	6/12
3500	2000	2500	3000	3500	4000	2245	4525	2315	4760	2345	4765	2410	4765	6/12
3700	2000	2500	3000	3500	4000	2345	4725	2415	4960	2445	4965	2510	4965	6/12
4000	2000	2500	3000	3500	3800/*4000	2545	5025	2615	5260	2645	5265	2710	5265	6/12
4500	1800/*1900	2200/*2400	2600/*3000	2850/*3600	3200/*4000	2795	5525	2865	5760	2895	5765	2960	5765	6/6*6/12
5000	1300/*1700	1450/*2200	2100/*2850	2400/*3150	2700/*3550	3045	6025	3115	6260	3145	6265	3210	6265	6/6*6/6
5500	*1500	*1700	*2400	*2700	*2900	3345	6525	3415	6760	3445	6765	3510	6765	*3/6
6000	*1300	*1400	*2000	*2300	*2600	3595	7025	3665	7260	3695	7265	3760	7265	*3/6

Remark\* means double tires

Duplex full free mast																			
	Capacity					Mast height								Free lifting height					Mast Tilt
Lifting	2T	2.5T	3T	3.5T	4T(Small)	2T-2.5T	2T-2.5T	3T	3T	3.5T	3.5T	4T(Small)	4T(Small)	2T-2.5T	3T	3.5T	4T(Small)		
Height	Single tire					Forks landing	Height with Backrest	Forks landing	Height with Backrest	Forks landing	Height with Backrest	Forks landing	Height with Backrest	With Backrest				angle F/R	
mm	kg	kg	kg	kg	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	°	
2000	2000	2500	3000	3500	4000	1495	3035	1565	3275	1595	3273	1660	3260	511	337	367	435	6/12	
2500	2000	2500	3000	3500	4000	1745	3535	1815	3775	1845	3773	1910	3760	761	587	617	685	6/12	
3000	2000	2500	3000	3500	4000	1995	4035	2065	4275	2095	4273	2160	4260	1011	837	867	935	6/12	
3300	2000	2500	3000	3500	4000	2145	4335	2215	4575	2245	4573	2310	4560	1161	987	1017	1085	6/12	
3500	2000	2500	3000	3500	4000	2245	4535	2315	4775	2345	4773	2410	4760	1261	1087	1117	1185	6/12	
3700	2000	2500	3000	3500	4000	2345	4735	2415	4975	2445	4973	2510	4960	1361	1187	1217	1285	6/12	
4000	2000	2500	3000	3500	3800/*4000	2545	5035	2615	5275	2645	5273	2710	5260	1561	1387	1417	1485	6/12	

Remark Maximum increase of non - stop:2T-2.5T-420mm,3T-3.5T-580mm, 4T-485mm,  
Free lifting height of the shelf:2T-2.5T+420mm,3T-3.5T+580mm,4T+485mm(\* means double tires)

Triplex mast																		
Lifting Height	Capacity					Mast height								Free lifting height				Mast Tilt angle F/R
	2T	2.5T	3T	3.5T	4T(Small)	2T-2.5T	2T-2.5T	3T	3T	3.5T	3.5T	4T(Small)	4T(Small)	2T-2.5T	3T	3.5T	4T(Small)	
	Single tire					Forks landing	Height with Backrest	Forks landing	Height with Backrest	Forks landing	Height with Backrest	Forks landing	Height with Backrest	With Backrest				
mm	kg	kg	kg	kg	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	°
3600	2000	2500	3000	3350	4000	1765	4625	1830	4865	1830	4870	1880	4800	781	602	607	657	6/6
4000	2000	2500	3000	3350	4000	1900	5025	1965	5270	1965	5275	2013	5255	916	737	742	790	6/6
4350	1870*2000	2370*2500	2870*3000	3270*3300	3600*4000	2015	5375	2080	5615	2080	5620	2130	5605	1031	852	857	907	6/6
4500	1750*2000	2070*2500	2570*3000	3050*3300	3100*4000	2065	5525	2130	5765	2130	5770	2180	5755	1081	902	907	957	6/6
4800	1650*1800	1750*2300	2250*2800	2700*3000	2800*3600	2165	5825	2230	6065	2230	6070	2280	6055	1181	1002	1007	1057	6/6
5000	1450*1650	1500*2150	2000*2650	2450*2850	2600*3400	2230	6025	2295	6260	2295	6265	2347	6255	1246	1067	1072	1124	6/6
5500	*1350	*1650	*2300	*2600	*2800	2395	6525	2460	6755	2460	6765	2513	6755	1411	1232	1237	1290	*3/6
6000	*1100	*1300	*2100	*2350	*2500	2615	7025	2680	7265	2680	7270	2730	7255	1631	1452	1457	1507	*3/6

Remark Not to take the largest rise in the shelf:2T-2.5T-410mm,3T-3.5T -580mm, 4T-485mm,  
Free lifting height of the shelf:2T-2.5T+410mm,3T-3.5T+580mm, 4T+485mm, (\* means double tires)